



MINDERCHLOR
CHLORINE GENERATOR



Features & Advantages

- Auto Clean Technology with self-cleaning electrolytic cell
- High Efficiency toroidal transformer
- Over temperature and over current protection
- External reset button available
- LED light indicator for reverse polarity and warning light for water fault
- Low sale operation: 3500 to 4500ppm
- Technically advanced digital micro processing PCB
- Premium grade long life electrolytic cell
- Energy efficient low kW consumption

Warranty


Minderchlor	2 Years
-------------	---------

MinderChlor Chlorine Generator is engineered for reliability and easy operation. Electrolytic chlorine generation is the most effective and convenient way to maintain clean pool water. It has the same sanitation performance as manual chlorine dosing without the need to buy, transport and store expensive chlorine compounds.



Ideal Operating Condition



pH	7.2 - 7.4
Total Alkalinity	90ppm - 150ppm
Cyanuric Acid	40ppm - 65ppm
Salt	4000ppm
Chlorine	1.5ppm - 2.0ppm

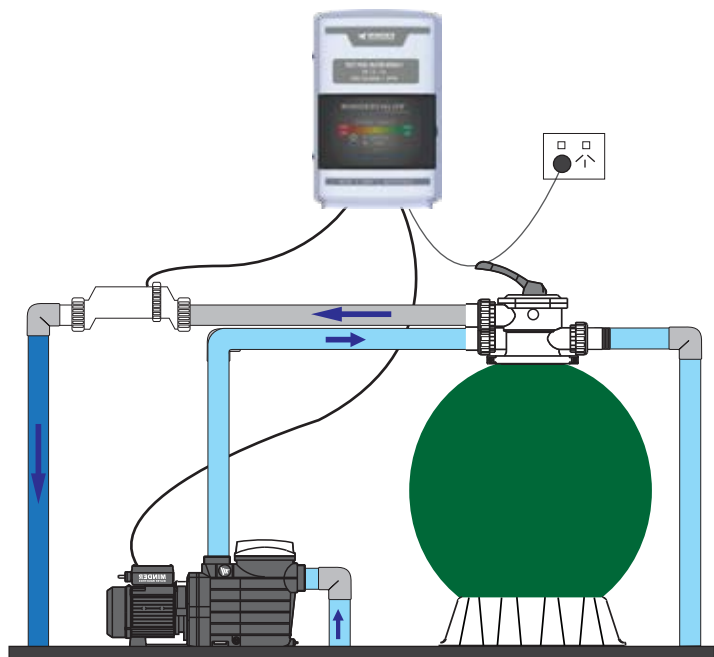

Technical Specification

Model	Product Code	Voltage	Power	Salinity	Max Chlorine Output		Connection Size	Max Pool Size	Waterproof Grade
			W		ppm	g/h			
MC20	90154	220-240V 50/60Hz	200	3500 - 4500	20	200	1.5" - 2.0"	65	IP24
MC25	90155		200		25	250		80	
MC30	90156		300		30	300		100	


Dimensions (mm)

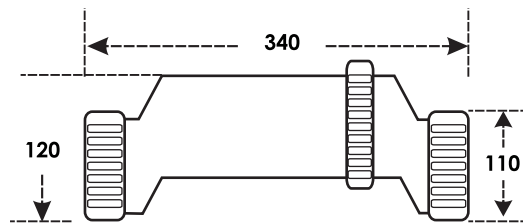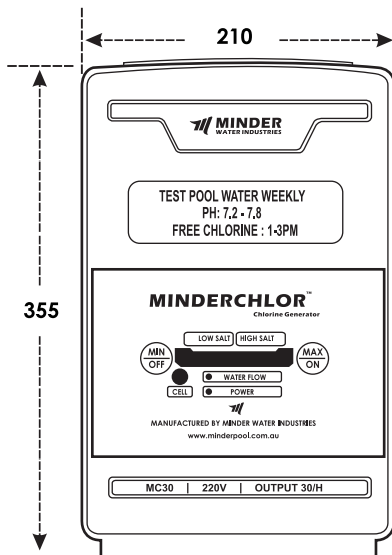

Choose your Minderchlor™

1. Determine your pool size (in thousand litres)
2. Move horizontally until you reach your climate zone
3. Do down to determine the amount of chlorine you require
4. If you budget allows, add extra 10-20%
5. In commercial installations, allow at least 100% extra

Chlorinator Sizing Chart

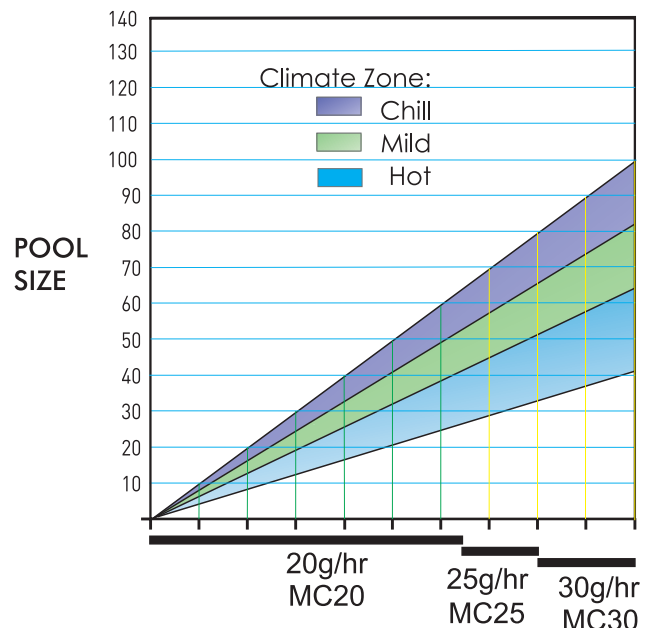



Printed in Australia
By BPA

Distributed internationally by Minder Water Industries Sdn. Bhd. All rights reserved 2018.
Distributed in Australia by Minder Water Industries Pty. Ltd.
Distributed in China by Minder Water Industries (Canton) Co. Ltd.
Distributed in South-East Asia by Minder Water Industries Sdn. Bhd.