




**CONTACT TANK**

- 100% based on NSF50 & MINDER standard for quality testing
- Maximum working pressure 250kpa (36psi), with factory testing pressure 400kpa (63psi)
- Anti-ozone corrosion coating
- Suitable for different ozone sanitation system
- Tailor-made available upon request

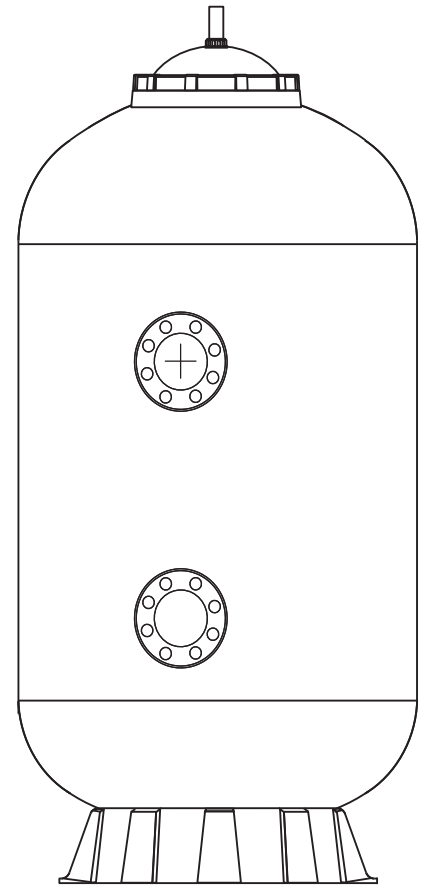

## Technical Specification

Model	Code	Tank Dia. (mm)	Height (mm)	Nozzle Size (mm)	Flow (m <sup>3</sup> /h)	Volume (m <sup>3</sup> )	Residence Time (s)
FC650	70969	621	1800	50	16	0.51	115
FC700	70102	705	1800	50	19	0.53	110
FC800	70097	821	1800	63	25	0.75	108
FC900	70455	921	2000	63	30	1.15	138
FC1000	70098	1016	2000	90	33	1.4	153
FC1200	70336	1200	2000	90	52	2	138
FC1400	70340	1400	2500	110	69	3.5	183
FC1600	70101	1600	2500	110	80	4.6	207
FC1800	70102	1800	3200	160	125	7.6	219
FC2000	71035	2000	3200	160	157	9.4	216



Printed in Australia  
By BPA

Distributed internationally by Minder Water Industries Sdn. Bhd. All rights reserved 2018.  
Distributed in Australia by Minder Water Industries Pty. Ltd.  
Distributed in China by Minder Water Industries (Canton) Co. Ltd.  
Distributed in South-East Asia by Minder Water Industries Sdn. Bhd.